




# Energy Solutions Wire Enamels

Product Overview Voltron®

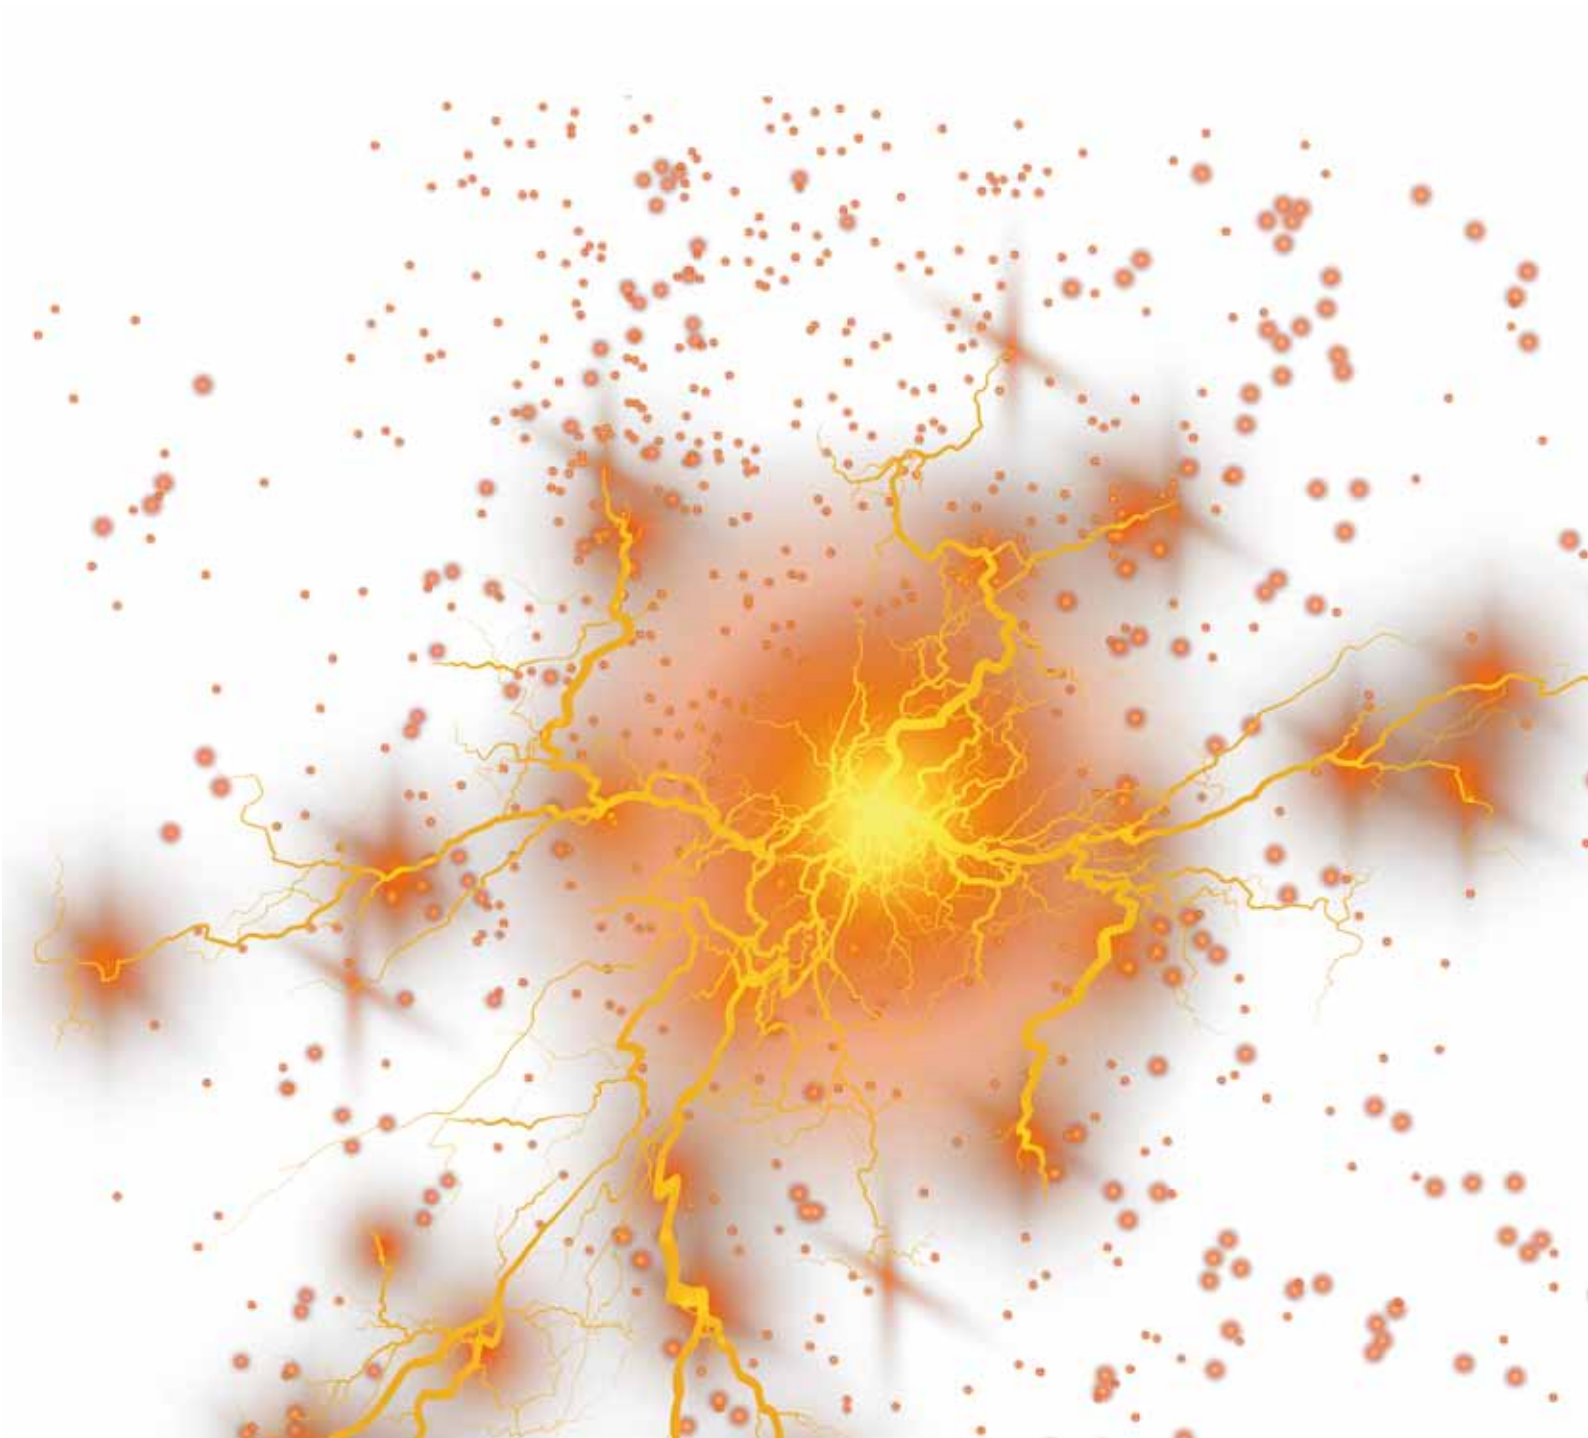

# Energy Solutions Wire Enamels

## Voltron® Systems



CR Systems	Wire Enamel	Ratio of WE	Passes*	Magnet Wire Range	Mechanical Stability	Chemical Stability	Corona Resistance
<b>Voltron® System 1210</b>	Voltatex® 7740 base coat	100 %	> 10	standard round: 0.3 - 2.00 mm	+	+	+++
<b>Voltron® System 1220</b>	Voltatex® 7740 base coat	85.0 % +/- 2.5 %	> 10	standard round: 0.3 - 2.00 mm	++	++	++
	Voltatex® 8227 top coat	15.0 % +/- 2.5 %	> 3				
<b>Voltron® System 1230</b>	Voltatex® 7740 base coat	70.0 % +/- 5.0 %	> 8	standard round: 0.3 - 2.00 mm	++	++	+
	Voltatex® 8227 top coat	30.0 % +/- 5.0 %	> 3				
<b>Voltron® System 1321</b>	Voltatex® 9127 primer	7.5 % +/- 2.5 %	1 - 2	heavy round: > 2.00 mm	+++	++	+
	Voltatex® 7740 base coat	77.5 % +/- 5.0 %	> 7				
	Voltatex® 8227 top coat	15.0 % +/- 5.0 %	> 2				
<b>Voltron® System 1421</b>	Voltatex® 9127 primer	7.5 % +/- 2.5 %	1 - 2	rectangular / square	+++	++	+
	Voltatex® 7735FL base coat	77.5 % +/- 5.0 %	> 7				
	Voltatex® 8227 top coat	15.0 % +/- 5.0 %	> 2				
<b>Voltron® System 2230</b>	Voltatex® 7740 base coat	70.0 % +/- 5.0 %	> 7	standard round: 0.3 - 2.00 mm	++	+++	+++
	Voltatex® 8534 top coat	30.0 % +/- 5.0 %	> 3				
<b>Voltron® System 2240</b>	Voltatex® 8534 base coat	100 %	> 15	standard round: 0.3 - 2.00 mm	+++	++	+++
<b>Voltron® System 3230</b>	Voltatex® 7340AX base coat	70.0 % +/- 5.0 %	> 7	standard round: 0.3 - 2.00 mm	+++	++	+
	Voltatex® 8534 top coat	30.0 % +/- 5.0 %	> 3				

Axalta Coating Systems Germany GmbH & Co. KG  
Energy Solutions  
Technical Service  
Christbusch 25  
D-42285 Wuppertal

Phone: +49 202 529-26 75  
-24 89

Fax: +49 202 529-28 21

[www.electricalinsulation.com](http://www.electricalinsulation.com)

