



## Audurra™ Foam Masking Tape Superior


### MASKING

#### Description:

An innovative foam tape for masking all vehicle gaps. Adjustable to required depth. Prevents hard paint edges. A unique, adjustable and efficient way to mask cars for paint and lacquer. For use in all apertures, A, B and C posts.

#### Features:

- For use in all apertures, A, B and C posts
- Precise fingertip adjustment
- Adjustable after application
- Removes post spraying rub down
- Can be used on moving parts
- One continuous length
- More absorbent
- No exposed adhesive
- Leaves no residue

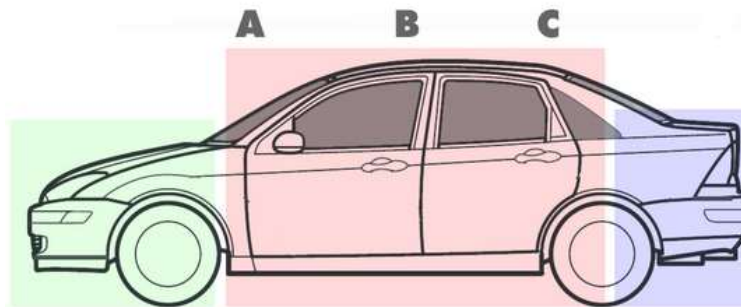

Visual explanation: A, B and C posts


## Audurra™ Foam Masking Tape Superior

### MASKING

#### Available in:

Article number	Dimensions	Packaging unit
D15365047	20mm x 50m	1 piece

#### Product Construction:

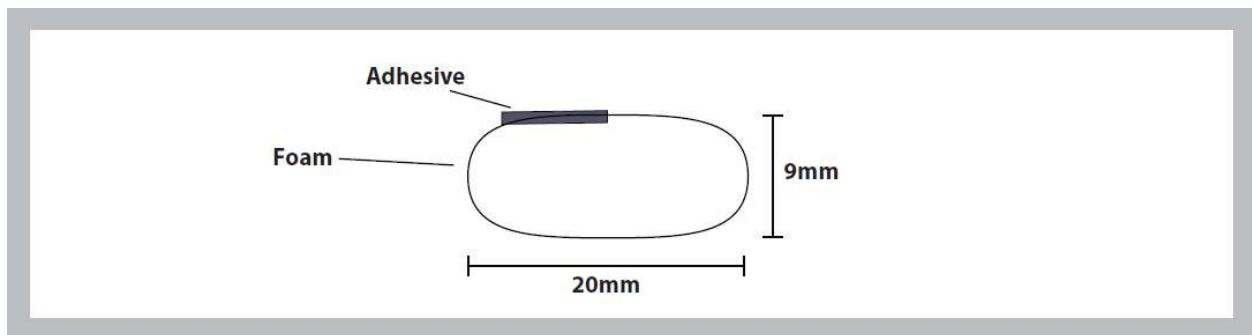



**Audurra™ Foam Masking Tape Superior**

**MASKING**

**Shelf Life:**

One year from date of receipt by customer when stored at 22°C (72°F) and 50% relative humidity.

**Physical Properties:**

Values shown are typical values and not to be used for specification purposes.

Foam	White
Adhesive	Rubber
Thickness	9mm (+/- 1mm)
Width	20mm (+/- 2mm)
Length	50m (+/- 2.5m)
Density	30 kg/m <sup>3</sup> (+/- 4 kg/m <sup>3</sup> )

**Performance Properties:**

Values shown are typical values and not to be used for specification purposes.

Peel Adhesion	N/25mm	6
Shear Adhesion	h/23°C	>10
UV Resistance		Limited
Temperature Resistance	1h/°C	95



## Audurra™ Foam Masking Tape Superior

### MASKING

#### How to use this product:



1. Choose aperture to be masked.



2. Apply tape behind the door edge taking care to place the adhesive behind the panel. Leave the adhesive free portion extending beyond the door edge.



3. Close the door. Adjust the tape into the gap to the required length.



4. Prepare the vehicle to be painted.

## Audurra™ Foam Masking Tape Superior

### MASKING

#### How to use this product:



5. Once the paint is dry, remove all the masking materials.



6. Once the tape is removed. Inspect edges and polish if necessary. The result: no extra rework.