

MASKING

Description:

Audurra Wheel Rim Repair Mask is a flexible solution for the masking of tires during the re-spraying of wheels. The product consists of a treated 20 micron MDPE paint absorbent film and has an elastic center piece which can expand to 26" in diameter. Temperature resistant.



Features:

- Elastic center piece
- Temperature resistant
- Maximum inner diameter: 26"
- Paint absorbent
- Flexible for all sizes of wheel
- Simple & easy to use

Available in:

Article number	Size	Color	Packaging unit
D15404063	170cm x 170cm	Purple	20 pieces


Published: 29.06.2023 Latest Update: 29.06.2023 Page 1 of 4

An Axalta Coating Systems Brand



MASKING

Product Construction:

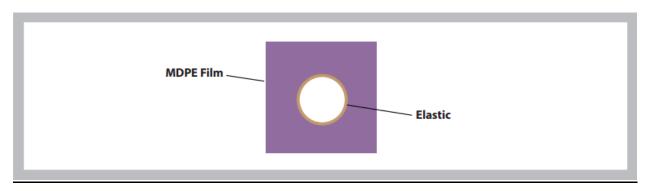

Shelf Life:

One year from date of receipt by customer when stored at 22°C (72°F) and 50% relative humidity.

Physical Properties:

Values shown are typical values and not to be used for specification purposes.

Carrier	MDPE Film
Color	Purple
Thickness	20 micron (+/- 0.1mic)
Width	170cm (+/- 0.5cm)
Length	170cm (+/- 0.5cm)






MASKING

Performance Properties:


Values shown are typical values and not to be used for specification purposes.

Elongation	Maximum inner diameter: 26"
Temperature Rating	Suitable for low bake cycles

How to use this product:



1. Remove wheel from the vehicle and deflate the tire.



2. Clean the inner rim ensuring it's free from dirt and grease.





MASKING

How to use this product (cont.):



3. Apply the product by placing the elasticated band around the rim, ensuring the treated side of the film is facing upwards.



4. Carefully flip over so the wheel is facing the ground, draw the corners of the product together and tape down.



5. To complete the masking process, flip the wheel over, checking that the elasticated band is still creating a seal and then paint.

