


An Axalta Coating Systems Brand



New Look, Lasting Protection.

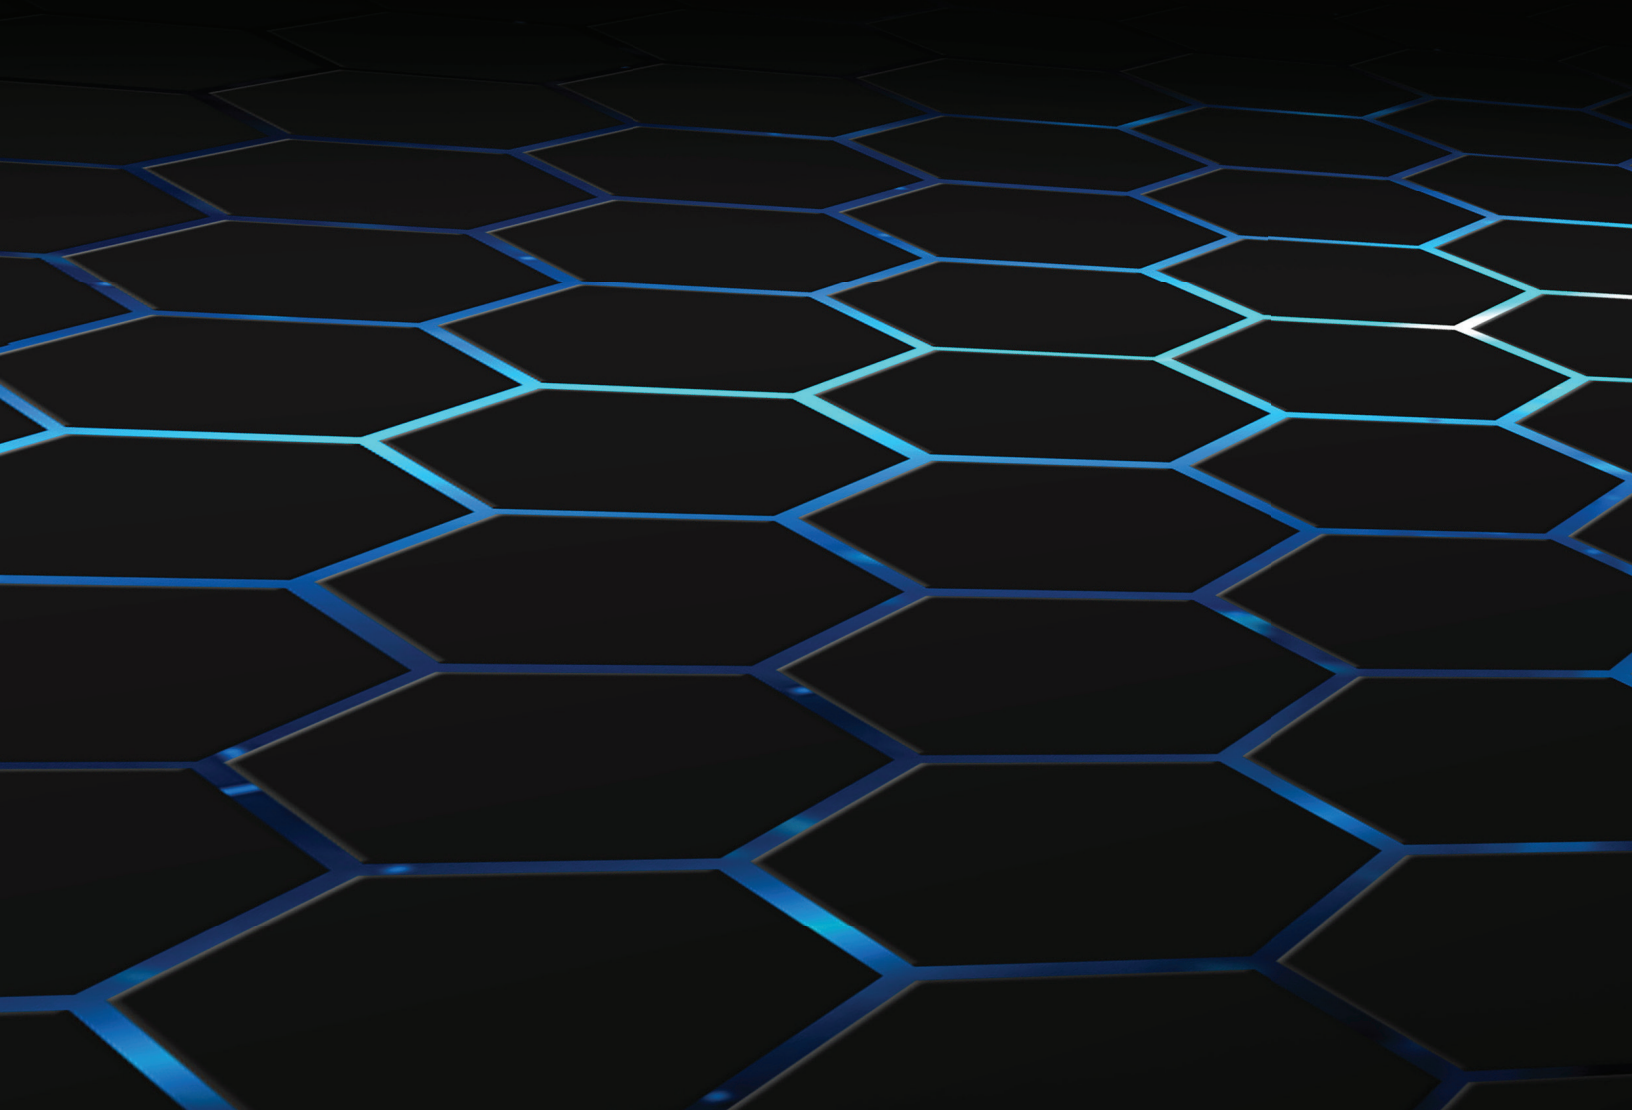

**A reputation built on quality,  
durability, performance, and  
unrivaed beauty.**



Premium products formulated to help increase productivity with easy to apply brush, roller or spray application and fast dry speed.

Representing the next generation of urethane technology, Imron Industrial offers a complete coating system for the most demanding specifications. These innovative products combine exceptional quality, performance, and brilliant high gloss color to deliver a coating recognized for nearly 50 years for its superior value and proven results.

Imron polyurethanes are available in solventborne and waterborne primers, topcoat, direct-to-metal (DTM), and clearcoat formulas with many products offered in multiple gloss levels, ranging from high gloss to flat. Axalta's Imron industrial products are available in thousands of industrial solid color positions, RAL colors, and safety colors which may be applied by brush, roller, or a variety of spray application methods, providing maximum flexibility.



**For nearly 50 years Imron has been recognized as the standard in long-term coating effectiveness and life cycle cost efficiency in industries such as:**

- Construction equipment
- Ready mix concrete plants and equipment
- Hot mix asphalt plants and equipment
- Fabricators and manufacturers
- Rail - locomotive, transit car and covered hopper cars
- Commercial, industrial and institutional facilities
- Amusement parks, rides, and equipment
- Ski resorts
- Portable and modular buildings
- Industrial maintenance, pipelines
- Chemical plants
- Oil refineries, off-shore platforms

# WATERBORNE COATINGS

## Primer

### **Imron 1.5 PR Waterborne Polyurethane Copolymer Primer**

- Unique waterborne polyurethane copolymer technology
- Very good chemical and corrosion resistance
- Isocyanate-free primer
- VOC: 1.5 lbs/gal | 180 grams/liter, Zero HAPs

## Topcoat

### **Imron 1.2 HG High Gloss Waterborne Polyurethane Copolymer Topcoat**

- Unique waterborne polyurethane copolymer technology
- Very good chemical and corrosion resistance
- Excellent color and gloss retention
- Isocyanate-free, high gloss finish
- Color mix capability, mix quality WG
- VOC: 1.2 lbs/gal | 144 grams/liter, Zero HAPs

## Clears

### **Imron 1.2 HG-C Clear Waterborne Polyurethane Copolymer**

- Unique waterborne polyurethane copolymer technology
- Restores gloss to dull, faded finishes
- Very good color and gloss retention
- Isocyanate-free, high gloss finish
- VOC: 1.2 lbs/gal | 144 grams/liter, Zero HAPs

### **Imron 1.8 FT-C Waterborne Polyurethane Copolymer**

- Unique waterborne polyurethane copolymer technology
- Helps restore and refresh protection to existing low gloss surfaces
- Very good color retention
- Isocyanate-free, flat gloss finish
- VOC: 1.8 lbs/gal | 215 grams/liter, Zero HAPs

## Direct-to-Metal

### **Imron 1.5 ST-D Waterborne Polyurethane Copolymer DTM**

- Unique waterborne polyurethane copolymer technology
- Excellent color and gloss retention
- Very good corrosion and chemical resistance
- Isocyanate-free, satin gloss finish
- Color mix capability, mix quality WF
- VOC: 1.5 lbs/gal | 180 grams/liter, Zero HAPs



# SOLVENTBORNE COATINGS

## Primers

### Imron Industrial Strength Low VOC Polyurethane Primer

- Unique Imron technology
- Outstanding flexibility and abrasion resistance
- High performance
- Wet on wet applications
- Fast dry
- VOC: 0.8 lbs/gal | 96 grams/liter

### Imron 2.1 PR Polyurethane Primer

- Smooth and sandable surface
- Excellent adhesion
- Outstanding flexibility and chip resistance
- VOC: 2.1 lbs/gal | 250 grams/liter

### Imron 2.8 PR Polyurethane Primer

- Flexible primer
- Excellent color and gloss retention
- Fast dry to recoat and handling
- VOC: 2.8 lbs/gal | 335 grams/liter

## Topcoats

### Imron Industrial Strength Ultra Low VOC Polyurethane Topcoat

- Intermix color technology, advanced adhesion properties
- Allows for in-field color shading
- Custom color and variable gloss availability
  - High Gloss Polyurethane, mix quality GN
  - Reduced Gloss Polyurethane, mix quality GO, GP, GQ
- Long-term color and gloss retention
- VOC: 0.3 lbs/gal | 36 grams/liter

### Imron 2.1 HG + High Gloss Polyurethane

- High performance, tough, industrial polyurethane topcoat
- Custom color and variable gloss availability
  - High Gloss Polyurethane, mix quality QH
  - Reduced Gloss Polyurethane, mix quality QM, QA, QF
- Outstanding gloss and color retention
- Excellent chemical resistance
- VOC: 2.1 lbs/gal | 250 grams/liter

### Imron 3.5 HG + High Gloss Polyurethane

- Highly durable finish delivers industry-leading polyurethane performance
- Outstanding abrasion resistance and flexibility
- Outstanding color and gloss retention
- Custom color and variable gloss availability
  - High Gloss Polyurethane, mix quality RH
  - Reduced Gloss Polyurethane, mix quality RM, RA, RF
- VOC: 3.5 lbs/gal | 420 grams/liter

## Clears

### Imron Industrial Strength 9C01 Polyurethane Clear

- Excellent color retention
- Excellent chemical resistance
- Very high gloss
- Restores gloss to dull, faded finishes
- VOC: 0.3 lbs/gal | 36 grams/liter

### Imron 2.1 HG-C High Gloss Polyurethane Clear

- Enhances and extends outstanding color and gloss properties
- High gloss shine
- Excellent chemical and abrasion resistance
- Application in temperatures as low as 35°F (1.7°C)
- VOC: 2.1 lbs/gal | 250 grams/liter

### Imron EZ-3460S Polyurethane Clear

- Unique technology
- Excellent cleaning properties (resist dirt, road tar, and tree sap)
- Restores gloss to dull, faded finishes
- VOC: 3.5 lbs/gal | 420 grams/liter

### Imron 2.8 FT-C Polyurethane Flat Clear

- Highly durable flat finish
- Restores faded finishes
- Outstanding color protection
- Outstanding chemical resistance
- VOC: 2.8 lbs/gal | 335 grams/liter

### Imron 3.4 HG-C High Gloss Clear Polyurethane

- Provides additional protection to extend a topcoat's color life
- Outstanding gloss and color retention
- Very low temp application, as low as 35°F (1.7°C)
- VOC: 3.4 lbs/gal | 407 grams/liter

### Imron 3.5 HG-C High Gloss Clear Polyurethane

- Provides additional protection to extend a topcoat's color life
- Provides the cleanest, "wet" mirror-like appearance
- Coated surfaces designed to be easy to clean
- Restores gloss to dull, faded finishes
- VOC: 3.5 lbs/gal | 420 grams/liter

## Direct-to-Metal

### Imron 2.1 HG-D + Direct-to-Metal Polyurethane

- Unique polyurethane technology
- Excellent abrasion resistance
- Mixed to match custom colors, mix quality SH
- Exceptional color and gloss retention
- High gloss, fast dry
- VOC: 2.1 lbs/gal | 250 grams/liter

### Imron 3.1 HG-D + Direct-to-Metal Polyurethane

- Unique polyurethane technology
- Excellent abrasion resistance
- Mixed to match custom colors, mix quality TH
- Exceptional color and gloss retention
- High gloss, fast dry
- VOC: 3.1 lbs/gal | 370 grams/liter



## **Patented polyurethane technology formulated to protect your most valuable assets.**

When you choose Imron, you get the industry benchmark in durability, color, and appearance for long-lasting protection.

Imron's industrial polyurethane products are built on an advanced technology platform designed to provide superior-quality gloss, pigmentation, application, durability, and weathering features.

For nearly 50 years, Imron has a proven history of consistent performance, high quality, and innovation.

And that's why it's asked for by name.





### **Intensely Durable**

Imron products are designed for excellent weathering properties, good flexibility, and excellent chemical and corrosion resistance.

### **Superior Color and Gloss**

These coatings deliver superior color consistency and outstanding performance that lasts. With advanced 'intermix' color technology, Imron Industrial Strength tints can be mixed for easy in-field color shading.

### **Highly Productive**

Imron features more consistent viscosity across color ranges, good melt-in and good sag resistance.

### **Ultra Low VOC**

Primers, topcoats, and clearcoats are formulated at a variety of VOC levels, some as low as 0.3 lbs/gal (36 g/l) to meet the most demanding industry regulations.

**Contact us.**  
1.855.6.AXALTA  
[axalta.us/imronindustrial](http://axalta.us/imronindustrial)

